

DATE: _____

PROJECT: _____

LOCATION: _____


**Centri-Vane All Aluminum
Inline Centrifugal Blower
Direct Drive**
DIMENSION DATA

Size	A	B	C	D	E	F	G	Wheel Dia.	Ga. of Alum.	Ship Wt. less Mtr.
8	8	13-1/4	13-7/16	7	1-5/16	11-1/4	10-1/4	10-1/4	.080	35
10	10	15	16-3/16	8-11/16	1-5/16	13	12-1/4	12-15/16	.080	65
12	12	17-1/8	19-1/4	9-15/16	1-5/16	15-1/8	14-1/8	15-9/16	.080	82
14	14	19-1/8	22	11-7/16	1-5/16	17-1/8	16-1/4	18-1/4	.080	93
16	16	21-9/16	24-7/8	12-11/16	1-5/16	19-9/16	18-1/4	20-15/16	.100	120
18	18	24-1/2	27-3/4	14	1-5/16	22-1/2	20-3/8	23-9/16	.100	166
20	20	26-3/8	30-1/2	15-3/4	1-5/16	24-3/8	22-1/2	26-1/4	.100	206



ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

STANDARD CONSTRUCTION FEATURES:

All aluminum construction - All angle operation -
 Straightening vanes - Prewired twist lock disconnect -
 Aluminum support bracket with extruded rubber isolator -
 Five year warranty.

ACCESSORIES

1. INLET SCREEN
2. OUTLET SCREEN
3. VIBRATION PADS
4. VOLUME CONTROL DAMPER
5. INLET VANE DAMPER
6. FLEXIBLE DUCT CONNECTOR
7. COMPANION FLANGE
8. EISEN-HEISS COATING
9. EPOXY COATING

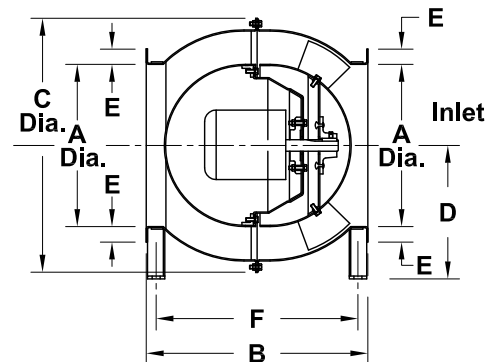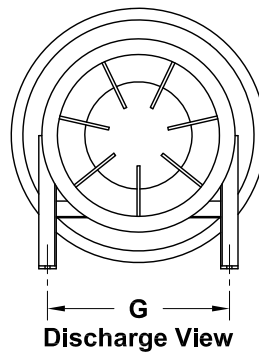

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES	
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE		

MOTOR TYPE: ODP (OPEN DRIP-PROOF); 2 SP (2 SPEED); TEFC (TOTALLY ENCLOSED FAN COOLED).