



# COOK

# TCN-D


DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_



## Tubular Centrifugal Inline Direct Drive Arr. 4

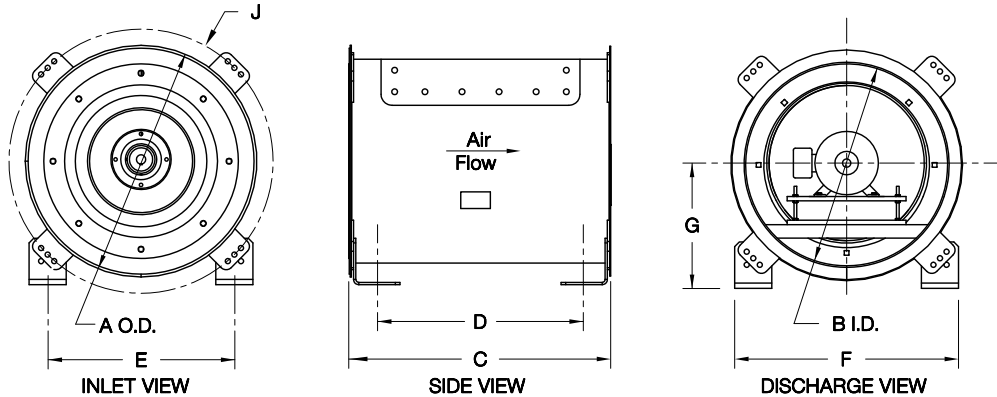

### STANDARD CONSTRUCTION FEATURES:

All aluminum wheel – Minimum 12 gauge steel housing with access door – Lorenized baked powder paint finish – Welded steel construction – Totally enclosed motor – Flanged inlet and outlet – Universal mounting feet and bracket for vertical or horizontal mounting.

### ACCESSORIES

1. DISCONNECT SWITCH
2. INLET/OUTLET FLEX DUCT CONNECTOR
3. INLET/OUTLET GUARD
4. INLET/OUTLET COMPANION FLANGE
5. ALUMINUM EXTERNAL INLET VANE DAMPER
6. STEEL EXTERNAL INLET VANE DAMPER
7. CEILING MOUNTED RUBBER IN SHEAR ISOLATORS
8. FLOOR MOUNTED RUBBER IN SHEAR ISOLATORS
9. CEILING MOUNTED SPRING ISOLATORS
10. FLOOR MOUNTED SPRING ISOLATORS

### DIMENSION DATA

Size	A	B	C	D	E	F	G	J	Max. Mtr. Frame	Ship Wt.*
60	19	16	22	18-1/2	14-11/16	17-11/16	10-1/8	20-15/16	145T	80
70	19	16	22	18-1/2	14-11/16	17-11/16	10-1/8	20-15/16	145T	80
80	19	16	22	18-1/2	14-11/16	17-11/16	10-1/8	20-15/16	145T	80
100	19	16	22	18-1/2	14-11/16	17-11/16	10-1/8	20-15/16	145T	80
120	21	18	23	19-1/2	16-1/8	19-1/8	10-7/8	22-15/16	184T	105
135	24	21	24-1/2	20	18-1/4	21-1/4	13-3/8	26	184T	130
150	27	24	27-1/4	22-1/2	20-3/8	23-3/8	14-1/2	29	215T	155
165	29	26	28-3/4	23	22-3/4	26-7/8	15-3/4	32-3/8	215T	185

ALL DIMENSIONS IN INCHES.

\* UNIT WEIGHTS IN LBS., BASED ON HEAVIEST STANDARD MOTOR.