


DATE: _____

PROJECT: _____

LOCATION: _____

**Insulated Backdraft Motorized Intake
Center Pivot Damper
ERV Outdoor Air Intake**

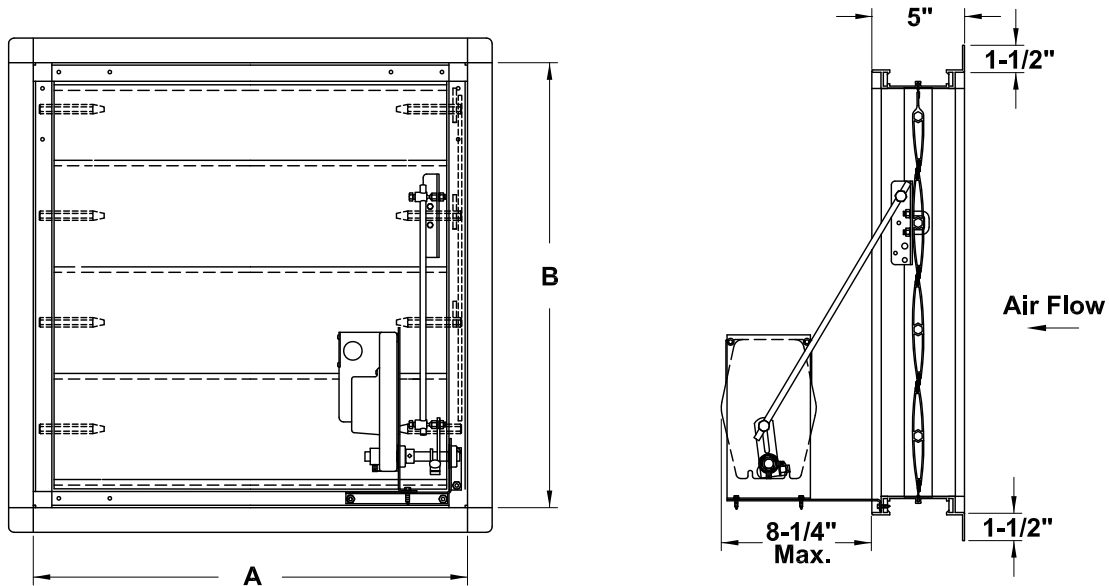

STANDARD CONSTRUCTION FEATURES:

16 ga galvanized steel blades - 16 ga galvanized steel frame -
1/2" plated steel hex hinge pins - Molded synthetic bearings -
24VAC Non-overloading motor.

DIMENSION DATA

Qty	Mark	Unit Size	Cat. No.	A	B	Unit Wt.
		1500	BDMICI-1500	13-3/4	17-3/4	19
		2500	BDMICI-2500	19-3/4	27-3/4	34
		3500	BDMICI-3500	19-3/4	33-3/4	40
		4500	BDMICI-4500	23-3/4	33-3/4	47
		5500	BDMICI-5500	23-3/4	43-3/4	58
		7000	BDMICI-7000	28-3/4	43-3/4	69
		8500	BDMICI-8500	28-3/4	52-3/4	82
		10000	BDMICI-10000	36-3/4	49-3/4	97

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.