


DATE: _____

PROJECT: _____

LOCATION: _____

**Insulated Backdraft Motorized Intake
Center Pivot Damper
ERV Return Air Arrangement H**

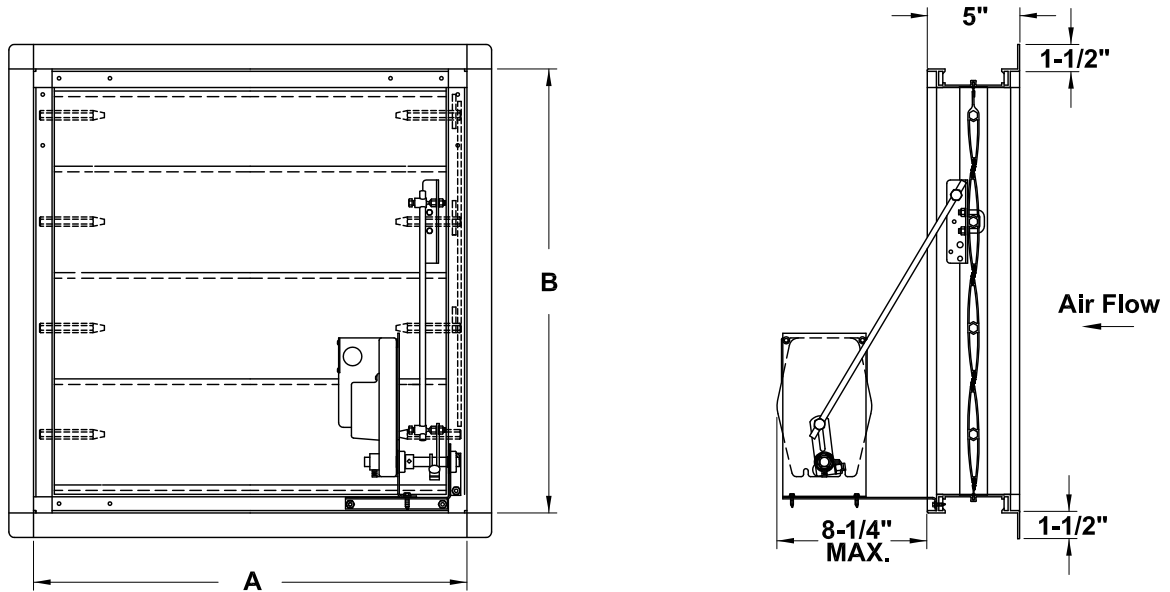

STANDARD CONSTRUCTION FEATURES:

16 ga galvanized steel blades - 16 ga galvanized steel frame -
1/2" plated steel hex hinge pins - Molded synthetic bearings -
24VAC Non-overloading motor.

DIMENSION DATA

Qty	Mark	Motorized Model No.	Gravity Model No.	Unit Size	A	B	Unit Weight
		BDMICI-H-1500	BDICI-H-1500	1500	17-1/2	13-1/2	19
		BDMICI-H-2500	BDICI-H-2500	2500	27-1/2	19-1/2	34
		BDMICI-H-3500	BDICI-H-3500	3500	33-1/2	19-1/2	40
		BDMICI-H-4500	BDICI-H-4500	4500	33-1/2	23-1/2	47
		BDMICI-H-5500	BDICI-H-5500	5500	41-1/2	22-1/2	54
		BDMICI-H-7000	BDICI-H-7000	7000	41-1/2	26-1/2	62
		BDMICI-H-8500	BDICI-H-8500	8500	45-1/2	26-1/2	67
		BDMICI-H-10000	BDICI-H-10000	10000	47-1/2	31-1/2	82

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.