



COOK


BDMICL-H

DATE: _____

PROJECT: _____

LOCATION: _____

Backdraft Motorized Intake Center Pivot Low Leakage Damper ERV Return Air Arrangement H

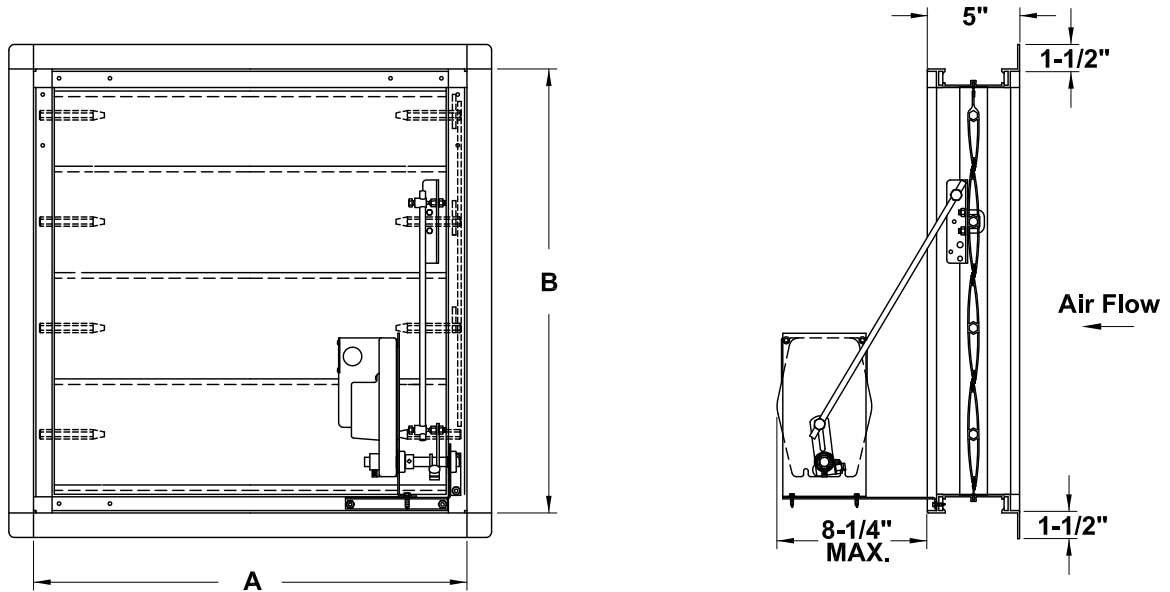

STANDARD CONSTRUCTION FEATURES:

14 ga galvanized steel blades - 16 ga galvanized steel frame -
1/2" plated steel hex hinge pins - Stainless steel sleeve bearings -
24VAC Non-overloading motor.

DIMENSION DATA

Qty	Mark	Motorized Model No.	Gravity Model No.	Unit Size	A	B	Unit Weight
		BDMICL-H-1500	BDICL-H-1500	1500	13-1/2	17-1/2	21
		BDMICL-H-2500	BDICL-H-2500	2500	19-1/2	27-1/2	38
		BDMICL-H-3500	BDICL-H-3500	3500	19-1/2	33-1/2	45
		BDMICL-H-4500	BDICL-H-4500	4500	23-1/2	33-1/2	52
		BDMICL-H-5500	BDICL-H-5500	5500	22-1/2	41-1/2	61
		BDMICL-H-7000	BDICL-H-7000	7000	26-1/2	41-1/2	70
		BDMICL-H-8500	BDICL-H-8500	8500	26-1/2	45-1/2	76
		BDMICL-H-10000	BDICL-H-10000	10000	31-1/2	47-1/2	92

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.