



COOK

ASP-B

DATE: _____

PROJECT: _____

LOCATION: _____




Air Supply Package Forward Curve-Belt Drive Side Discharge Roof Mounted

DIMENSION DATA

Model	A Sq.	B	C	D	E	T Sq.	Ship Wt.
90ASP	33-1/8	27-1/2	10-1/2	5-1/4	3	24-1/8	230
100ASP	38-1/2	31	12-1/4	5-1/4	3	28-1/8	250
120ASP	42-1/2	37-1/4	16-1/2	5-1/4	3	32-1/8	290
150ASP	45-3/4	39-3/4	16-1/2	5-1/4	3	32-1/8	330
180ASP	55-3/4	49	22-3/4	5-1/4	3	36-1/8	500
200ASP	68	60	29	5-3/4	3	48-1/8	750

Model	H x W Side Discharge Opening	Filters		Material Gauges	
		Qty	Size	Base	Housing
90ASP	10-1/8 x 11-9/16	4	10-1/4 x 19-3/4	16	18
100ASP	11-1/4 x 12-7/8	4	12 x 24	16	18
120ASP	13-5/16 x 15-3/8	4	16 x 28	16	18
150ASP	15-3/4 x 18-3/8	4	16 x 28	16	18
180ASP	18-3/4 x 21-5/8	4	20 x 32	16	18
200ASP	24-7/8 x 24-3/4	4	27-3/4 x 44	16	18

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.

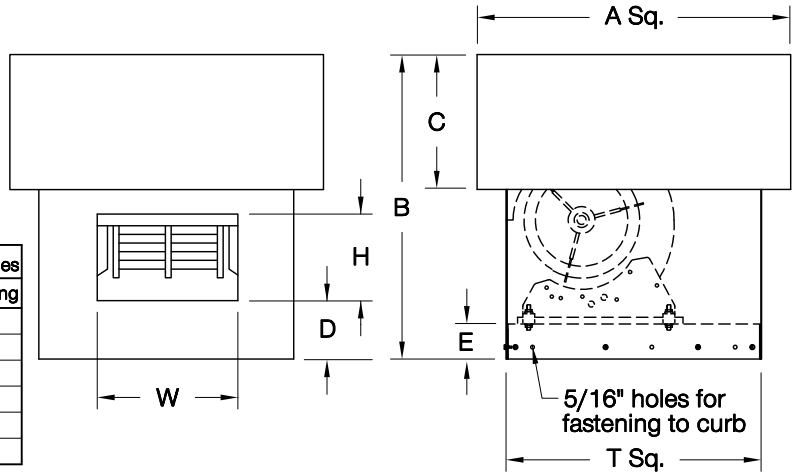

STANDARD CONSTRUCTION FEATURES:

DWDI blower mounted in a totally enclosed heavy gauge galvanized cabinet
 - Galvanized intake hood with 1" aluminum permanent washable filters
 - Top cap securely bolted in four corners - Permanently lubricated ball bearings motor - Adjustable pitch drives through 5 HP - Corrosion resistant fasteners - All fans factory adjusted to specified fan RPM.

ACCESSORIES

1. GRAVITY INTAKE DAMPER
2. MOTORIZED INTAKE DAMPER
3. RCG GALVANIZED CURB
4. RCA ALUMINUM CURB
5. LIFTING LUGS/TIE DOWN POINTS
6. 2" ALUMINUM FILTERS

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES										
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE											

LARGEST MOTOR SHIPPED MOUNTED: **ODP** (OPEN DRIP-PROOF) 1 HP (SIZES 90-180), 5 HP (SIZE 200); **2 SP** (2 SPEED) NONE (SIZES 90-180), 1-1/2 HP (SIZE 200); **TEFC** (TOTALLY ENCLOSED FAN COOLED) NONE (SIZES 90-180), 1-1/2 HP (SIZE 200).