


DATE: _____
 PROJECT: _____
 LOCATION: _____



Ceiling and Wall Units 1000 & 2000 Series

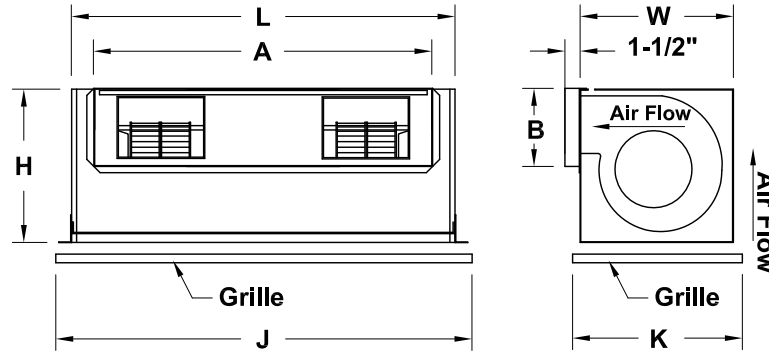

DIMENSION DATA

Model No.	Housing			Outlet		Standard Grille		Ship Wt.
	L	W	H	A	B	J	K	
1000	38-1/8	15-1/4	15-1/4	33-11/16	7-11/16	42-3/8	17-1/8	125
2000	45-7/16	16-5/8	16-5/8	41-1/8	9-5/8	49-1/2	18-1/2	165

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

STANDARD CONSTRUCTION FEATURES:

Twin forward curved galvanized steel fan wheels - Corrosion resistant galvanized steel fan housing - Acoustically insulated housing - Aluminum backdraft damper with solid aluminum hinge rod mounted in brass bushings - Permanently lubricated motor with built-in thermal overload protection - Interchangeable panels with removable fasteners allows the discharge to be easily changed - Powder-painted white steel grille standard on ceiling fan.

* NOT AVAILABLE FOR 3-PHASE MOTOR

ACCESSORIES

1. FAN SPEED CONTROL (FSC)*
2. ROOF CAP
3. BRICK VENT
4. HANGING VIBRATION ISOLATOR

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES								
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE									

MOTOR TYPE: TENV (TOTALLY ENCLOSED NON-VENTILATING).