COOK VCRD/VCRD-HP/VCRD-XP

DATE: _____

PROJECT: _____

LOCATION: _____

Upblast Centrifugal Exhaust Ventilator

Hurricane / Missile Impact Resistant

Roof Mounted/Direct Drive

DIMENSION DATA

Size	A	B	C			D	G	T Sq.	Ship Wt.	Roof Opening Sq.*
			VCRD	VCRD-HP	VCRD-XP					
100	12-1/2	25-1/4	21-15/16	-	-	16-1/2	2	18	30	13-1/2
120	19-1/16	30-3/16	28-1/4	-	-	20-1/8	2	20	61	15-1/2
135	19-1/16	30-3/16	28-5/8	-	-	20-1/8	2	20	66	15-1/2
150	20-15/16	34-11/16	30-1/4	27-1/2	-	23-9/16	2	24	77	19-1/2
165	20-15/16	34-11/16	30-3/4	27-3/4	26-11/16	23-9/16	2	24	83	19-1/2
180	24-13/16	39-7/16	35-7/8	33-3/8	31-9/16	25-7/8	3	30	100	25-1/2
195	24-13/16	39-7/16	-	33-1/2	32-1/8	25-7/8	3	30	110	25-1/2

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.
* ROOF OPENING SIZE FOR CURBS SUPPLIED BY COOK ONLY.

LISTED POWER VENTILATOR FOR RESTAURANT EXHAUST APPLICATIONS - 327Y.

MAXIMUM OPERATING TEMPERATURE 300°F (UL 762)

MIAMI-DADE COUNTY, FLORIDA
Notice of Acceptance (NOA) Number 14-1218.04/11-13-2018
-TAS-201: Large Missile Impact Test
-TAS-202: Uniform Static Air Pressure Test
-TAS-203: Cyclic Wind Pressure Test

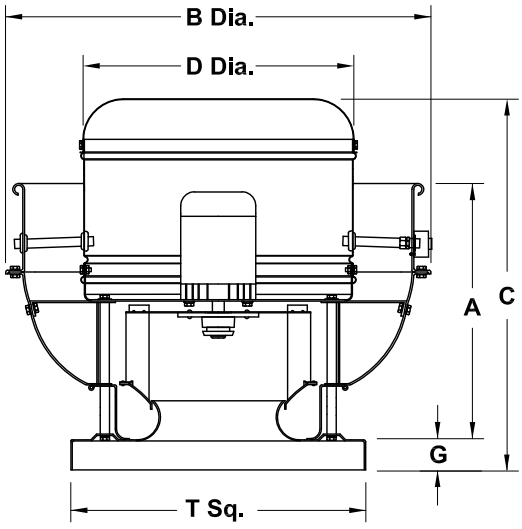

STANDARD CONSTRUCTION FEATURES:

All aluminum housing - Backward inclined all aluminum wheel - Two piece top cap with stainless steel quick release latches - One piece bottom spinning - Welded curb cap corners - Permanently lubricated ball bearing motors - Corrosion resistant fasteners - Transit tested packaging

ACCESSORIES

1. DISCONNECT SWITCH
2. RCG GALVANIZED CURB
3. VE VENTED EXTENSION
4. HINGED BASE
5. GREASE TERMINATOR
6. GREASE TROUGH

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES			
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE				

MOTOR TYPE: **ODP** (OPEN DRIP-PROOF); **2 SP** (2 SPEED); **X-PRF** (EXPLOSION PROOF); **TEFC** (TOTALLY ENCLOSED FAN COOLED).