


DATE: _____
 PROJECT: _____
 LOCATION: _____



**Centrifugal Square Inline
 Side Discharge, Direct Drive
 Preprogrammed PM
 Electronically Commutated
 Vari-Flow® Motor**

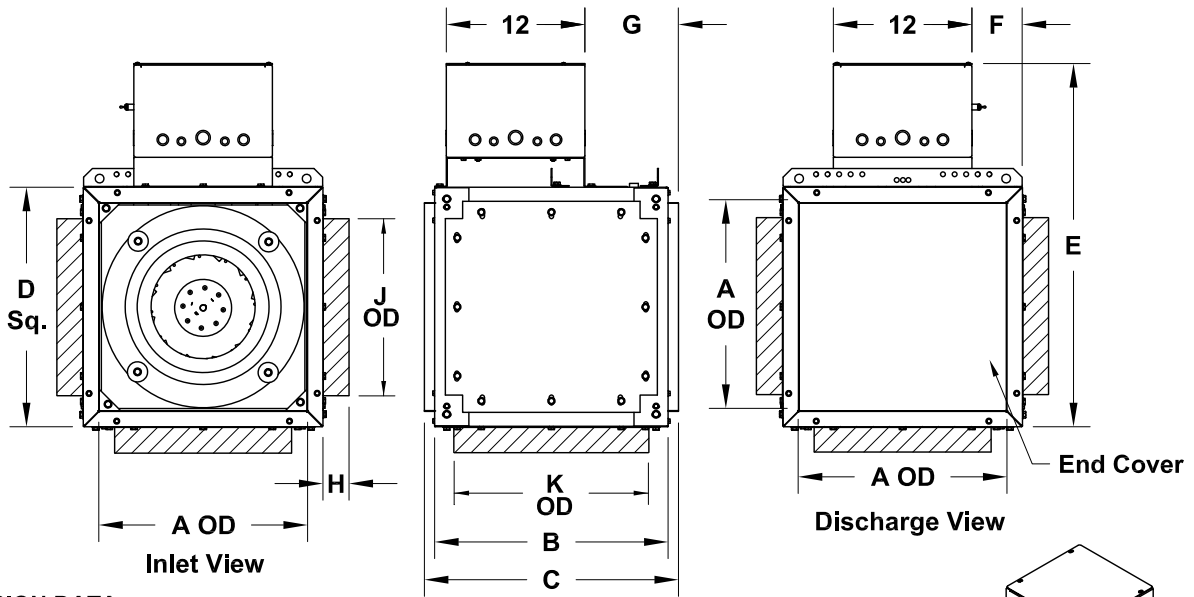

DIMENSION DATA

Size	A	B	C	D Sq.	E	F	G	H	J	K	Unit Wt.
120	16	20	22	18-7/16	29-3/16	3-3/16	2-1/8	1	12-9/16	14-1/8	74
135	18	20-1/4	22-1/4	20-3/4	31-1/2	4-3/8	8-1/8	1	13-1/8	14-1/4	93
150	20	21-7/8	23-7/8	23	31-1/8	5-1/2	11-3/4	1	16-1/8	15-15/16	110
165	22	25	27	25-5/16	33-1/2	6-5/8	13-7/8	1	18-1/8	19-1/8	123

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., INCLUDING MOTOR.


Note:
 Side discharge duct collar shipped loose for field installation in any of 3 locations shown shaded above.

STANDARD CONSTRUCTION FEATURES:

All aluminum wheel - Galvanized 18 gauge steel housing - Three removable access doors - Closed cell neoprene gasketing - Inlet and discharge duct collars - Universal mounting feet - Preprogrammed PM electronically commutated Vari-Flow® motor/drive package - Transit tested packaging.

ACCESSORIES

- SIDE DISCHARGE PACKAGE
- DUAL SIDE DISCHARGE PACKAGE
- DISCONNECT SWITCH
- INSULATED HOUSING
- INLET/OUTLET FLEX DUCT CONNECTOR
- INLET GUARD
- OUTLET GUARD
- FLANGED INLET/FLANGED OUTLET
- INLET/OUTLET COMPANION FLANGE
- GRAVITY BACKDRAFT DAMPER
- MOTORIZED BACKDRAFT DAMPER
- CEILING MOUNTED RUBBER IN SHEAR ISOLATORS
- FLOOR MOUNTED RUBBER IN SHEAR ISOLATORS
- CEILING MOUNTED SPRING ISOLATORS
- FLOOR MOUNTED SPRING ISOLATORS
- LORENIZED COATING



QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES	
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE		