



COOK SQND/SQND-HP/SQND-XP

DATE: _____

PROJECT: _____


LOCATION: _____



**Centrifugal Square Inline
Side Discharge
Direct Drive
Sizes 180-365**

STANDARD CONSTRUCTION FEATURES:

All aluminum wheel - Galvanized steel housing - Two removable access doors - Closed cell neoprene gasketing - Inlet and discharge duct collars - Universal mounting feet - Permanently lubricated motor - Transit tested packaging

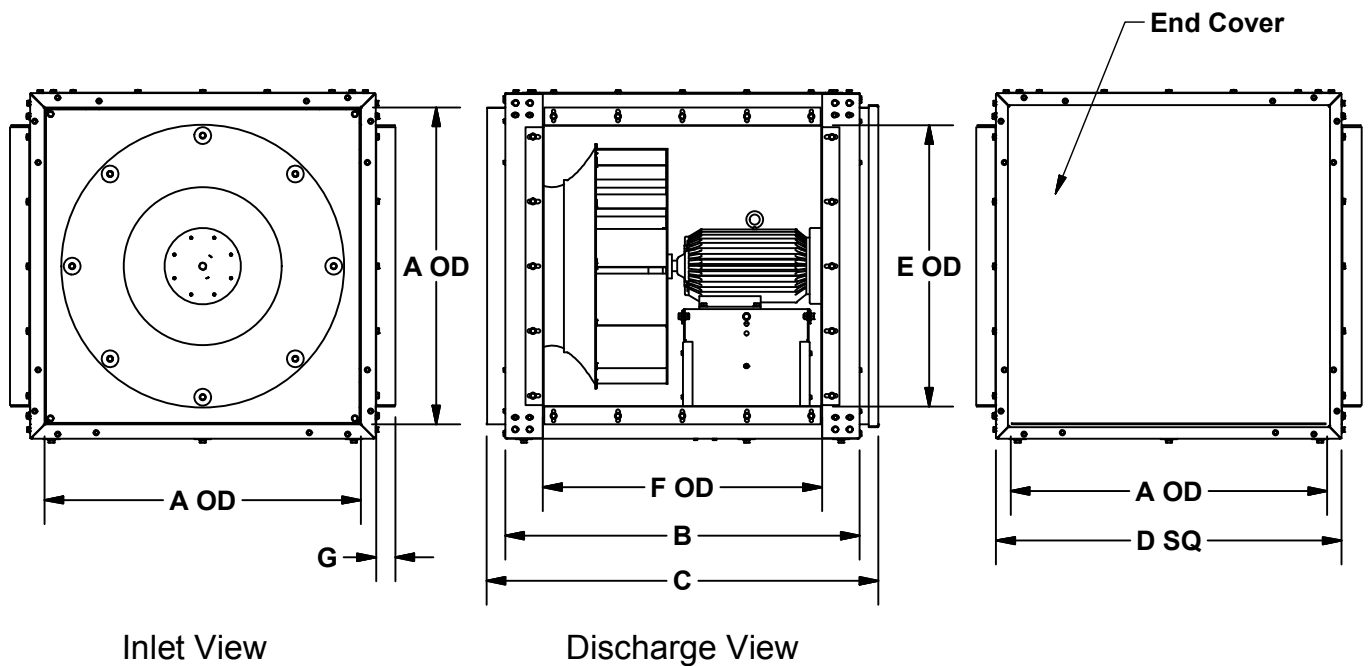

SIZE	A	B	C	D Sq.	E	F	G	MAX MTR FRAME	UNIT WT. STD	UNIT WT. HP	UNIT WT. XP
180	24	28	30	27 5/8	21	20 1/8	1	184T	138	134	134
195	26	30 1/4	32 1/4	29 15/16	23 1/4	22 1/8	1	215T	158	154	153
210	28	32	35	31 1/4	24 1/2	24 1/8	2	215T	174	170	169
225	30	34 1/4	37 1/4	33 1/2	26 3/4	26 1/8	2	254T	214	210	208
245	33	36 11/16	40 13/16	36	28 7/8	29 1/8	2	254T	248	245	242
270	36 3/8	41	45	39 11/16	33 3/16	32 1/2	2	256T	303	299	296
300	40	46	50	44	38 1/8	36 1/8	2	256T	357	352	347
330	44	51	55	48 7/16	41 1/16	40 1/8	2	286T	484	477	473
365	46	56 13/16	60 13/16	50	47	42 1/16	2	286T	529	521	516

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS., LESS MOTOR.

SQ016R00