

DATE: _____
 PROJECT: _____
 LOCATION: _____

Wall Propeller Supply Fans
 AWD, AWB, EWB, EWD, XWD
 XWHD, XLW, XMW, XLWH, XMWH


DIMENSION DATA

XWD XWHD	AWB AWD	XMW, XMWH XLW, XLWH	EWB EWD	Filter Size	Filter Qty.	A	B	C	Approx. Ship Wt.	
									Steel	Aluminum
10-12	10-12	-	-	26-3/4 x 16-3/16	1	16-15/16	63	13	107	60
14-16	14-16	-	-	29 x 20-3/16	1	20-15/16	63	13	125	70
18-20	18-20	-	-	24-3/16 x 24-7/8	2	24-15/16	63	13	151	85
-	-	20	-	24-3/16 x 24-7/8	2	24-15/16	71	21	151	85
24	-	-	-	26-3/16 x 14-7/8	4	30-15/16	63	13	181	102
-	24	24	-	26-3/16 x 14-7/8	4	30-15/16	71	21	181	102
-	30	30	24	27-7/8 x 17-7/8	4	36-15/16	71	21	237	133
-	36	36	30	25-3/4 x 20-7/8	6	42-15/16	71	21	278	156
-	42	42	36	26-3/4 x 23-7/8	6	48-15/16	76	26	312	175
-	48	48	42	25-1/4 x 17-7/8	12	54-15/16	76	26	385	216
-	-	54	48	26 x 19-7/8	12	60-15/16	78	28	422	237
-	-	60	54	26-7/8 x 21-7/8	12	66-15/16	78	28	457	256
-	-	-	60	21 x 27	12	72-15/16	78	28	517	290

FILTER AREA IN SQUARE FEET, SHIPPING WEIGHT IN POUNDS, ALL OTHER DIMENSIONS IN INCHES.

STANDARD CONSTRUCTION FEATURES:

Galvanized steel or aluminum housing - Removable access door - Closed cell neoprene gasketing added where filter contacts housing for a more positive seal - Washable 2 inch aluminum filters.

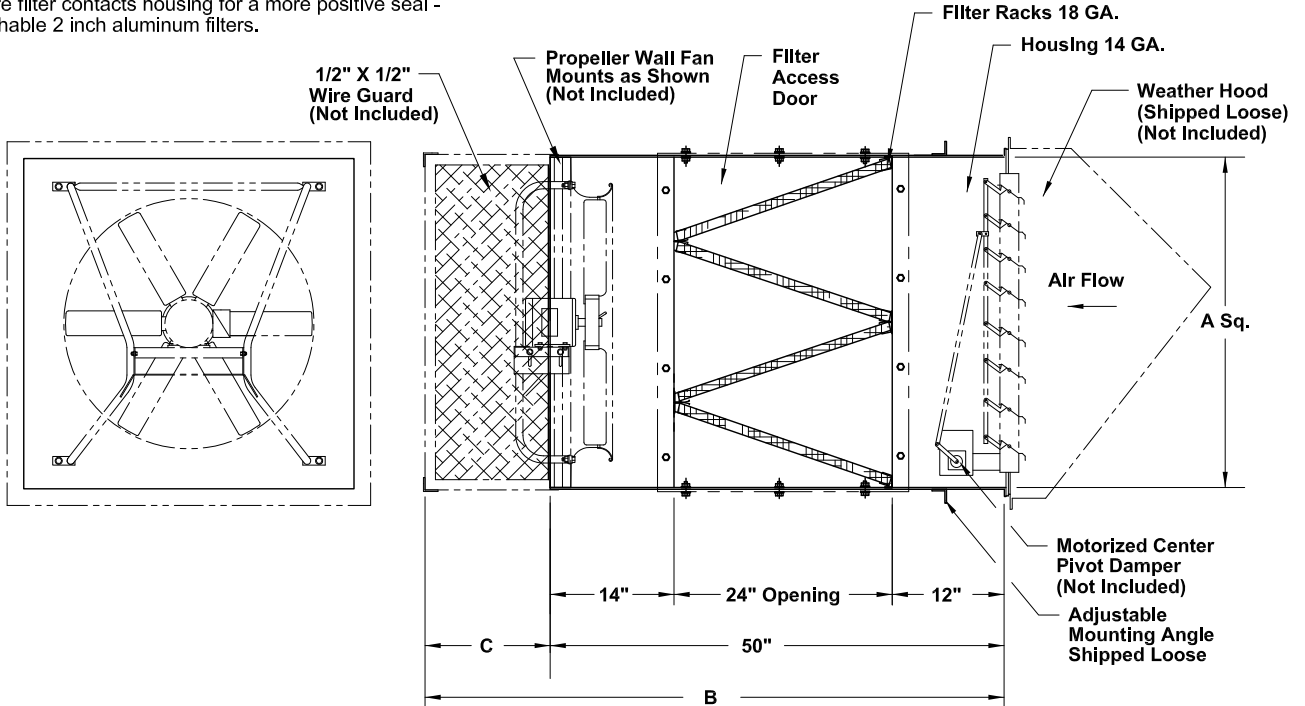

NOTE: AIRSTREAM VELOCITY THROUGH FILTERS NOT TO EXCEED 400 FPM.