


DATE: _____
 PROJECT: _____
 LOCATION: _____



**Wall Fan
 Aluminum Propeller
 Direct Drive**

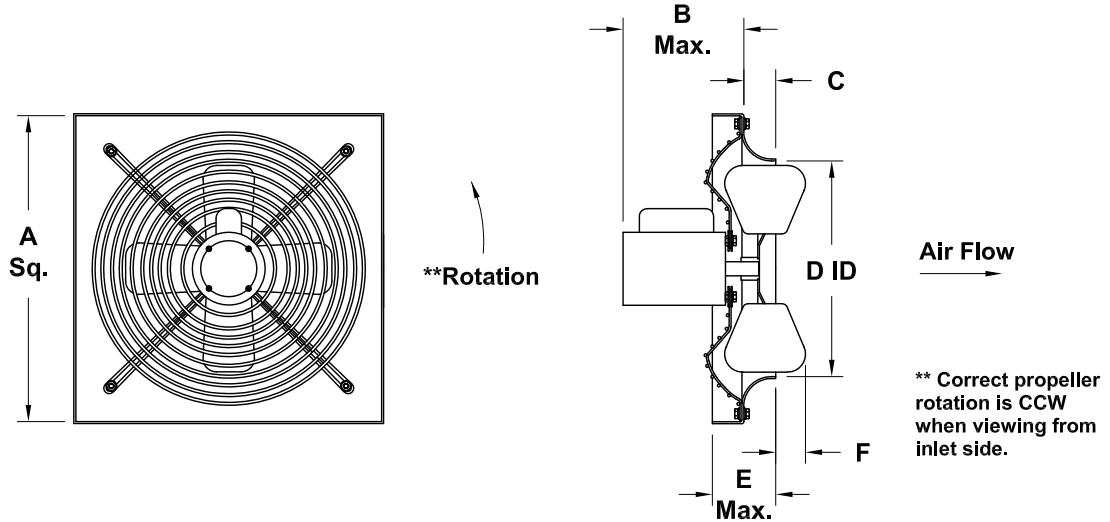

DIMENSION DATA

Size	A Sq.	B max.	C	D Dia.	E	F	Wall Opening*	Approx. Ship Wt.
8	12-3/16	3-1/4	1	8-3/4	3	3/4	12-7/16	12
10	16-3/16	4-3/4	1-1/2	10-3/4	3-1/2	1-1/2	16-7/16	20
12	16-3/16	4-3/4	1-3/4	12-3/4	3-3/4	1-1/2	16-7/16	22
14	20-3/16	5-13/16	2-1/2	14-3/4	4-1/2	1-5/8	20-7/16	26
16	20-3/16	5-13/16	2-1/2	16-3/4	4-1/2	2	20-7/16	30
18	24-3/16	5-13/16	2-3/4	18-3/4	4-3/4	2-1/8	24-7/16	34
20	24-3/16	5-13/16	2-3/4	20-3/4	4-3/4	2-1/8	24-7/16	40
24	30-3/16	6-1/16	3-3/4	25	6-5/8	1-3/8	30-7/16	48

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS. INCLUDES ODP MOTOR.
 * See wire guard or wall collar submittal for accessory wall opening.

ACCESSORIES

1. GALVANIZED SHUTTER - GRAVITY OR MOTORIZED
2. ALUMINUM SHUTTER - GRAVITY OR MOTORIZED
3. BAKED EPOXY POWDER
4. BAKED PHENOLIC EPOXY POWDER
5. PROP SIDE WIRE GUARD
6. MOTOR SIDE WIRE GUARD
7. WALL COLLAR
8. WEATHER HOOD
9. SHUTTER GUARD
10. DISCONNECT SWITCH
11. FAN SPEED CONTROL

STANDARD CONSTRUCTION FEATURES:

Aluminum propeller blades attached to a steel hub - Propellers are statically and dynamically balanced - 14 gauge steel venturi - Welded wall base corners - Lorenized powder paint finish - Plated steel motor mount/wire guard - Corrosion resistant fasteners - Single phase open drip-proof motor

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES									
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE										

MOTOR TYPE: ODP (OPEN DRIP-PROOF).