




COOK

RCG-AT/RCA-AT

DATE: _____
 PROJECT: _____
 LOCATION: _____

**Galvanized Steel or Aluminum
 Sound Attenuator Roof Curb**

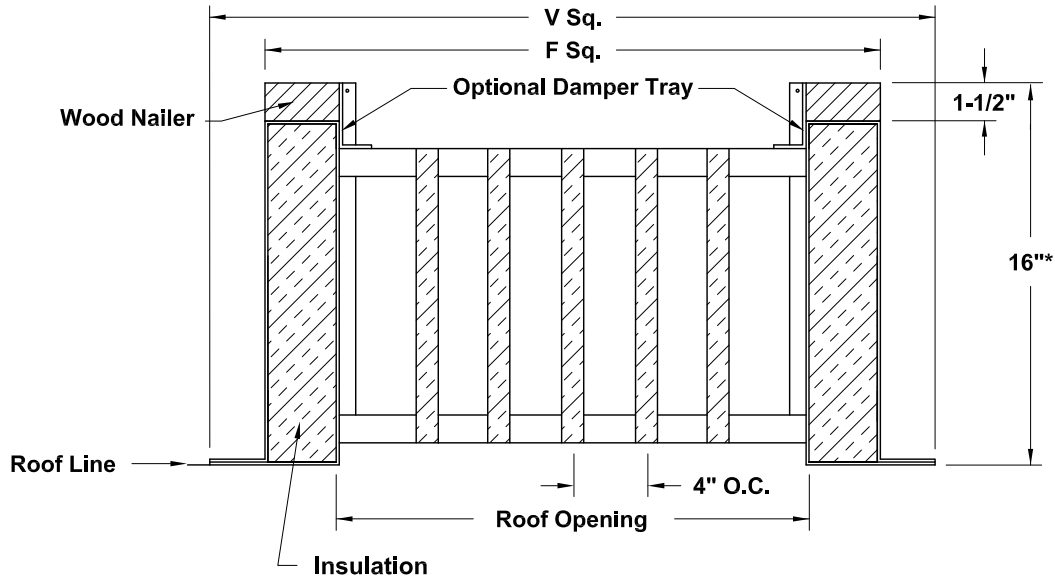

STANDARD CONSTRUCTION FEATURES:


Curb: 18 gauge galvanized steel or .080 aluminum -
 Insert: 20 gauge galvanized steel or .080 aluminum -
 1-1/2", 3 lbs. thermal and accoustical insulation -
 Continuously welded corners - Wood nailer.

OPTIONS:

**Damper Tray - required for backdraft damper installation, requires minimum 24" tall curb, center pivot dampers required a minimum 30" tall curb.

AVERAGE SOUND LEVEL REDUCTION:

OB1	OB2	OB3	OB4	OB5	OB6	OB7	OB8
-5	-11	-9	-14	-18	-28	-35	-25

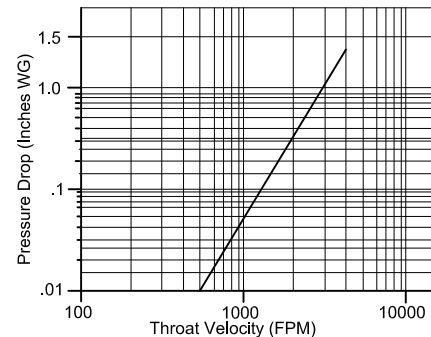

DIMENSION DATA

Qty	Mark	Centrifugal Units	Propeller* Units	UCV/CVR Units	Cat. No.		F Sq.	V Sq.	Roof Open.	Ship Wt.	
					Galvanized	Aluminum				Galv.	Alum.
		60,70,80,90,100	-	-	RCG-AT-16	RCA-AT-16	16-1/2	20-1/2	13-1/2	31	18
		120,135	12	12	RCG-AT-18	RCA-AT-18	18-1/2	22-1/2	15-1/2	35	20
		150,165	-	14,16	RCG-AT-22	RCA-AT-22	22-1/2	26-1/2	19-1/2	42	25
		-	16	18,20	RCG-AT-26	RCA-AT-26	26-1/2	30-1/2	23-1/2	49	29
		180,195,210,225,245	-	-	RCG-AT-28	RCA-AT-28	28-1/2	32-1/2	25-1/2	52	31
		-	20	24	RCG-AT-30	RCA-AT-30	30-1/2	34-1/2	27-1/2	56	34
		270,300	24	28	RCG-AT-34	RCA-AT-34	34-1/2	38-1/2	31-1/2	63	38
		330,365	30	32	RCG-AT-40	RCA-AT-40	40-1/2	44-1/2	37-1/2	74	44
		402	36	36	RCG-AT-46	RCA-AT-46	46-1/2	50-1/2	43-1/2	119	85
		445,490	42	-	RCG-AT-52	-	52-1/2	56-1/2	49-1/2	134	-
		-	48	-	RCG-AT-58	-	58-1/2	62-1/2	55-1/2	149	-
		540	54	-	RCG-AT-64	-	64-1/2	68-1/2	61-1/2	164	-
		-	60	-	RCG-AT-70	-	70-1/2	74-1/2	67-1/2	179	-
		-	72	-	RCG-AT-82	-	82-1/2	86-1/2	79-1/2	208	-

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS. *NOT AVAILABLE WITH LSU, LSUE.