



COOK cFS - Gravity Intake Damper


DATE: _____

Gravity Intake Center Pivot Damper

PROJECT: _____

CFS Filtered Supply Unit

LOCATION: _____

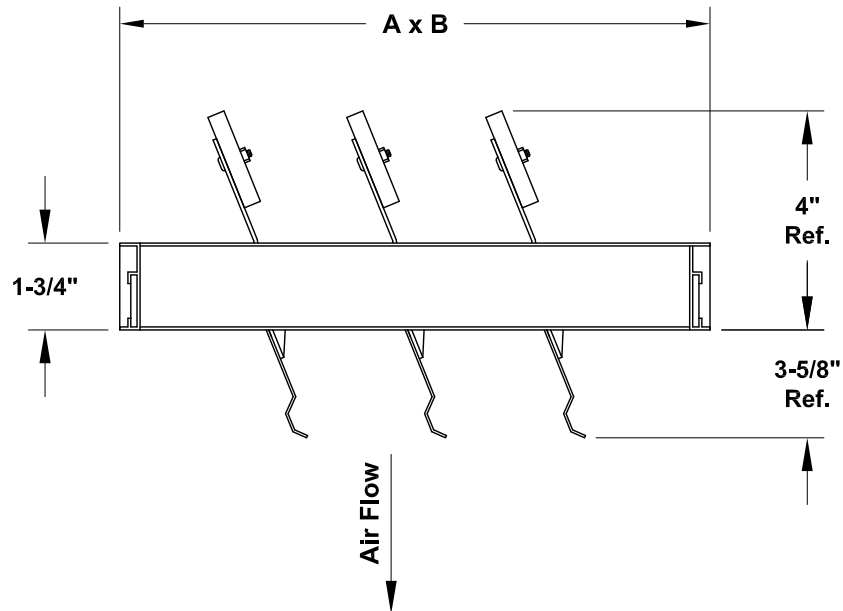

STANDARD CONSTRUCTION FEATURES:

- .062 aluminum blades - .050 aluminum frame -
- .188 zinc pivots - Self-lubricating nylon bushings.

NOTES:

Max operating temperature 200°F (95°C).

DIMENSION DATA

Qty	Mark	Unit Size	A	B	Ship Wt.
		120	17-11/16	12-1/8	11
		135	19-15/16	13-5/8	13
		150	22	15-1/4	16
		165	24	16-15/16	19
		180	26-1/16	18-1/2	22
		195	28-7/16	19-1/2	24
		210	30-3/8	21-5/8	26
		225	32-1/2	23-3/16	29
		245	35-1/16	25-1/2	32
		270	39-7/16	27-1/2	36
		300	43	31-3/16	39
		330	47-1/16	34-1/2	45
		365	52-3/16	38-11/16	49

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

X0213R03