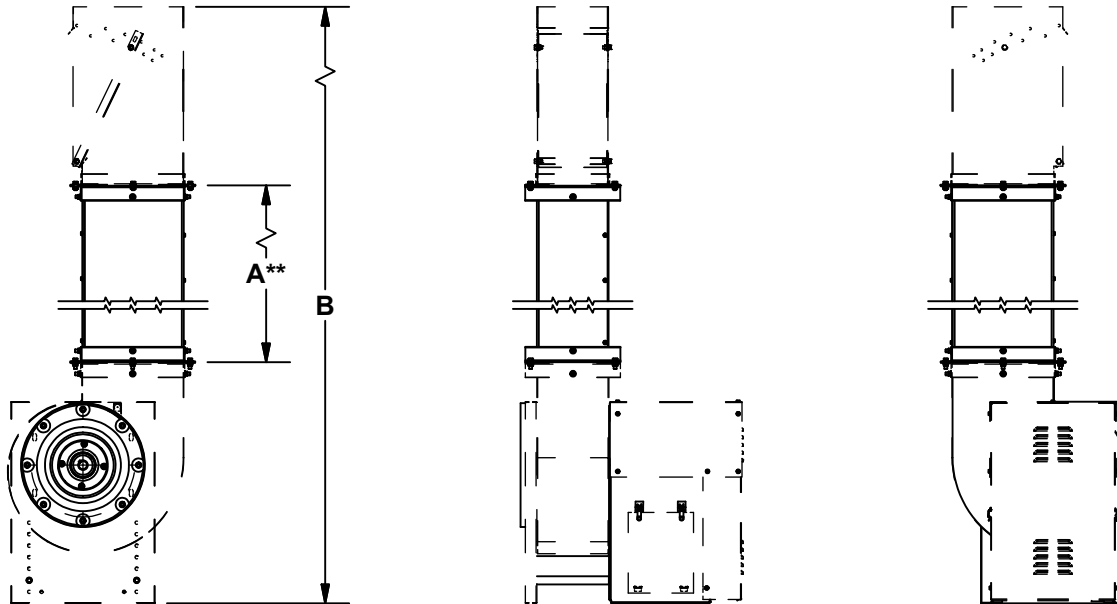


MARK: _____

PROJECT: _____

DATE: _____

Accessory Data Sheet
CPSLE-S & CPSALE-S
Upblast
Class I & II

Standard Construction Features:

- Corrosion resistant aluminum construction.
- Stainless Steel Fasteners.
- Designed to withstand 125 mph wind without the need for guy wires *.

*Wind Rating Dependant on Adequate Mounting Structure.

**This section may consists of more than one stack section for shipping.

DIMENSION DATA

Size	A CL-I	A CL-II	B	UNIT WT. CL I	UNIT WT. CL II
100	70 1/4	n/a	120	48	n/a
120	65 3/8	61 3/8	120	55	53
135	62	57 15/16	120	58	43
150	57 15/16	55	120	48	47
165	53 5/8	50 1/16	120	50	48
180	48 3/8	46 7/16	120	51	49
195	44 5/16	43 3/4	120	52	51
210	37 15/16	37 15/16	120	51	51
225	33	33	120	49	49
245	27 7/16	27 7/16	120	52	52
270	19 3/8	19 3/8	120	49	49
300	9 1/4	9 1/4	120	43	43

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.