

DATE: _____

PROJECT: _____


LOCATION: _____

Accessory Data Sheet

External Speed Control

Electronically Commutated (EC) Motor

Type N

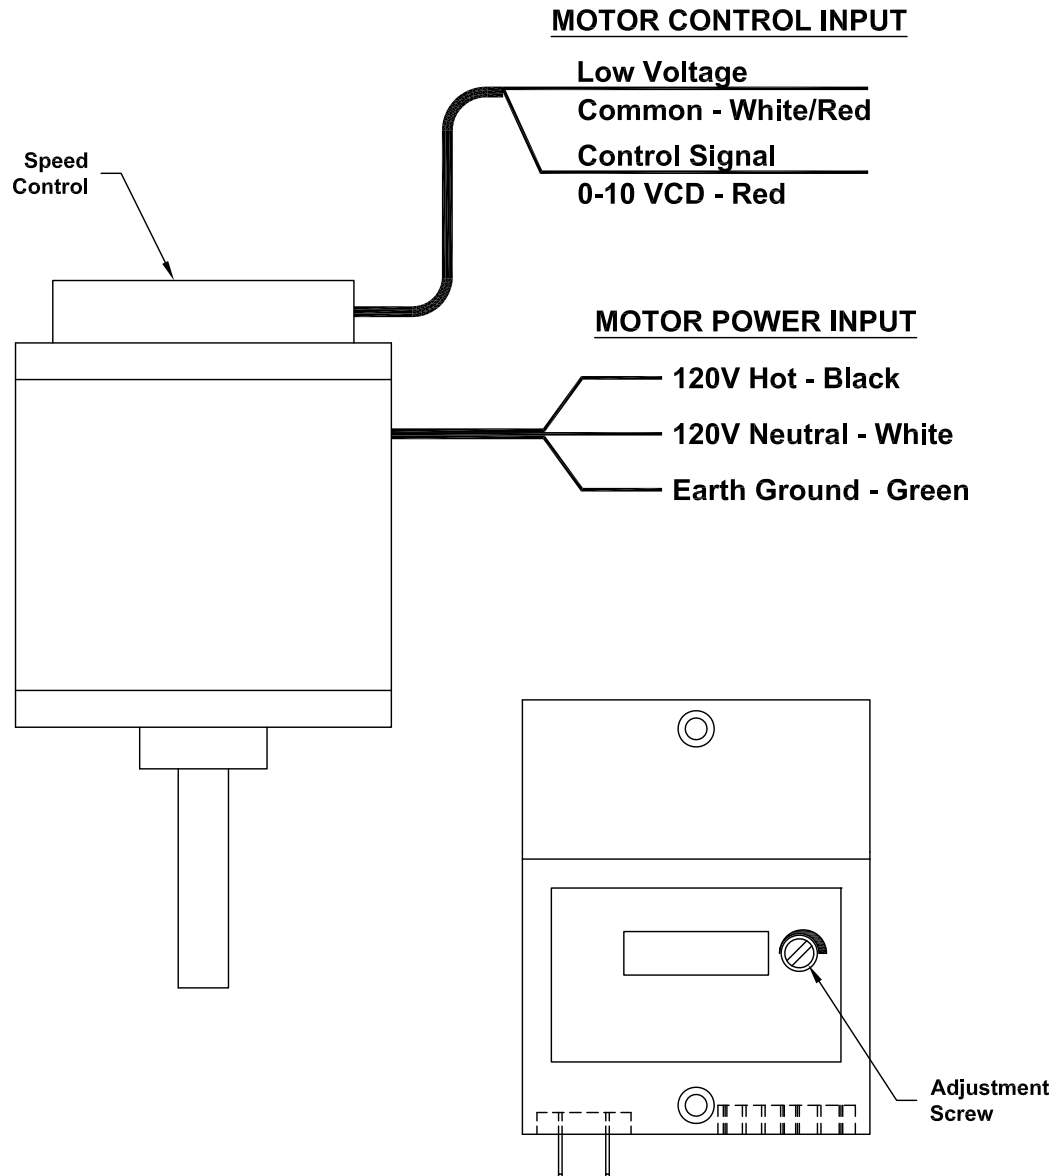

STANDARD CONSTRUCTION FEATURES:

EC Motors are available in 3/4 and 1 HP for 120V - Single phase applications have an adjustable speed range of 500 to 1725 - External signal speed control requires a 0-10 VDC control signal to adjust speed of the motor - The motor will operate from 2-10 VDC and turns off when the control signal is below 1.9 VDC - Dial on speed control must be set to 0 for proper external speed control operation.