


DATE: _____
 PROJECT: _____
 LOCATION: _____

Accessory Data Sheet
 External Speed Control
 Electronically Commutated (EC) Motor
 Type N

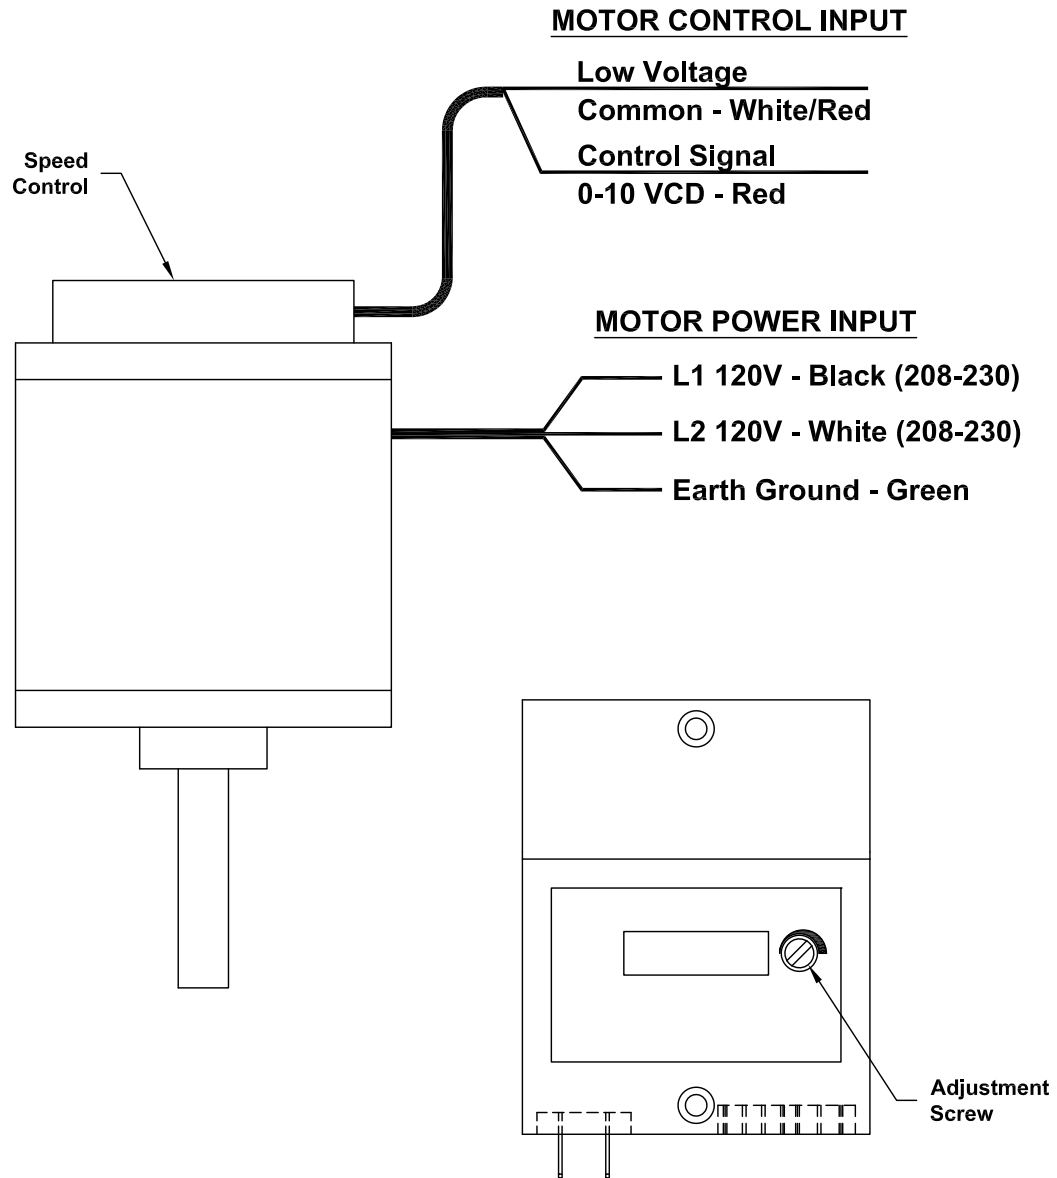

STANDARD CONSTRUCTION FEATURES:

Vari-Flow EC Motors are available in 1/8 to 1 HP for 120V or 208-230V - Single phase applications have an adjustable speed range of 500 to 1725 or 500 to 2800 - Some motors come with a factory programmed maximum RPM for specific applications - External signal speed control requires a 0-10 VDC control signal to adjust speed of the motor - The motor will operate from 2-10 VDC and turns off when the control signal is below 1.9 VDC - Dial on speed control must be set to 0 for proper external speed control operation.