






VFD

DATE: _____
 PROJECT: _____
 LOCATION: _____

Accessory Data Sheet
Variable Frequency Drive
HVAC Drive
IP20
Invertek HVAC Series
Three Phase

SPECIFICATIONS:

Input Range: 575±10% VAC Three Phase / 48-62Hz
 Output Power 575V Three Phase 1-5 HP
 Output Ratings: Overload Capacity 110% Overload for 60 sec.
 Output Frequency 0~120Hz, .1Hz resolution
 Ambient Condition: Temperature Operating 10 to 40°C
 Altitude up to 2000m maximum UL approved
 Above 1000m derate by 1% per 100m
 Enclosure: IP20 (NEMA 1)
 Programming: Built in keypad
 Control Specifications: PWM Frequency 4-32kHz Effective
 Stopping Modes:
 Ramp to stop adjustable 1 to 600 seconds
 Coast to stop
 Motor flux braking
 Skip Frequency single point user adjustable
 Setpoint Control
 MODBUS RTU, BACnet, BACnet/IP, Profibus DP,
 DeviceNet, EthernetIP
 I/O Specifications: Power Supply 24 Volt DC, 100mA,
 10 Volt DC, 5mA for potentiometer
 Programmable Inputs: 5 Total, 3 Digital, 2 D/A selectable
 Programmable Outputs: 4 Total, 2 D/A selectable, 2 relay
 Relay Output: Maximum 250V/6A AC, 30V/5A DC
 Analog Output: 0 to 10 Volt
 Control Features: Internal PID control with feedback
 Standards: UL, cUL
 Compliance:

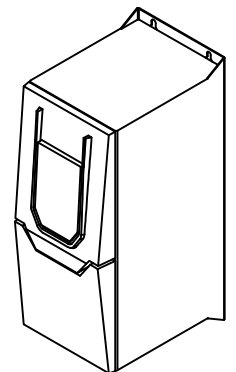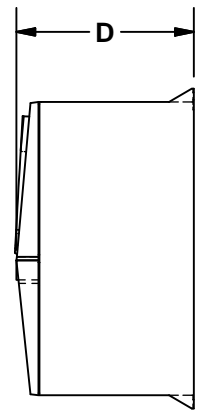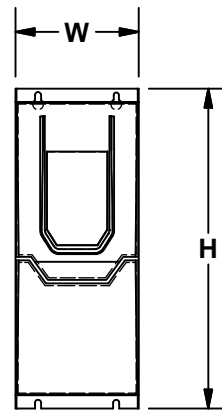

DIMENSION DATA

Catalog No.	Voltage	HP	Output*	H	W	D	Wt.
VO2J12N00M	575	1	1.7	10.12	7.40	9.41	10.6
VO2J14N00M	575	2	3.1	10.12	7.40	9.41	10.6
VO2J15N00M	575	3	4.1	10.12	7.40	9.41	10.6
VO2J16N00M	575	5	6.1	10.12	7.40	9.41	10.6

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.
 *RATED OUTPUT CURRENT (AMPS)