




DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_

**Spun Aluminum  
Intake/Relief  
Ventilator**

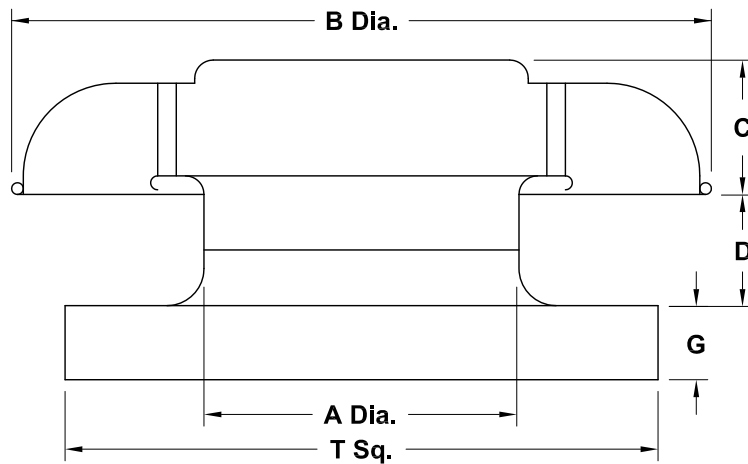

### DIMENSION DATA

Size	A Dia.	B Dia.	C	D	G	T Sq.	Roof Opening	Ship Wt.
8	8-5/8	18-3/4	4-5/8	3-1/2	2	18	13-1/2	13
12	12-1/2	27-3/4	5-1/16	3-1/2	2	20	15-1/2	20
16	16-1/2	27-3/4	5-1/16	5-1/2	2	28	23-1/2	25
20	20-1/2	36-5/8	6-3/4	4-7/8	2	32	27-1/2	40
24	24-3/4	42-3/4	8	6-1/4	3	36	31-1/2	127
30	30-3/4	52-5/8	17-1/4	6-1/4	3	42	37-1/2	183
36	36-3/4	62-5/8	17-1/2	7-1/2	3	48	43-1/2	255
42	42-3/4	73-5/8	14	8	3	54	49-1/2	287
48	48-3/4	73-5/8	14	8	3	60	55-1/2	288

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

### ACCESSORIES

1. BIRDSCREEN
2. GRAVITY BACKDRAFT DAMPER
3. MOTORIZED BACKDRAFT DAMPER
4. GRAVITY INTAKE DAMPER
5. MOTORIZED INTAKE DAMPER
6. RCG GALVANIZED CURB
7. RCA ALUMINUM CURB
8. EPOXY COATING
9. ANTI-CONDENSATE COATING

### STANDARD CONSTRUCTION FEATURES:

All aluminum construction - Anti-backdraft flange -  
Five year warranty.