



COOK

HEF - D

DATE: _____

PROJECT: _____

LOCATION: _____




**Hooded Filtered Ventilator
Extruded Aluminum Propeller
Roof Mounted/Direct Drive**

DIMENSION DATA

Size	A	B	C	L x W	T Sq.	Material Ga.		Max Mtr Frame	Roof Opening Sq.*	Approx. Ship Wt.
						Base	Hood			
20	28-3/4	2	10	59 x 59	32	14	18	145T	27-1/2	382
24	30-1/2	3	10	69 x 69	36	14	18	184T	31-1/2	514
30	33	3	10	80 x 80	42	14	18	184T	37-1/2	667
36	38	3	10	90 x 90	48	14	18	215T	43-1/2	850
42	41-1/2	3	13-1/2	110 x 90	54	14	18	256T	49-1/2	1047
48	44-1/2	3	14-3/4	111 x 109	60	14	18	256T	55-1/2	1085
54	44-1/2	3	14-3/4	121 x 119	66	14	18	286T	61-1/2	1279

ALL DIMENSIONS IN INCHES. SHIP WEIGHTS IN POUNDS, LESS MOTOR.
* ROOF OPENING SIZE FOR CURBS SUPPLIED BY COOK ONLY.

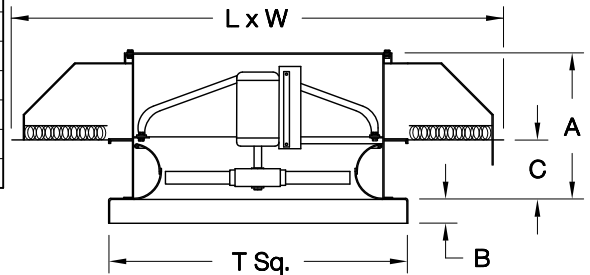

STANDARD CONSTRUCTION FEATURES:

Extruded aluminum propeller – Spun steel Venturi/curb cap – Painted steel lower housing – Galvanized steel hood – Heavy duty steel power assembly – Welded curb cap corners – Propellers are statically and dynamically balanced – Corrosion resistant fasteners.

NOTE:
Size 36–54 require field assembly of hood.

ACCESSORIES

1. DISCONNECT SWITCH
2. GRAVITY INTAKE DAMPER
3. MOTORIZED INTAKE DAMPER
4. RCG GALVANIZED CURB
5. RCA ALUMINUM CURB
6. ALUMINUM HOOD
7. FIBERGLASS FILTER MEDIA
8. POLYESTER FILTER MEDIA
9. EPOXY COATING
10. SPECIAL

QTY	MARK	CATALOG NUMBER	FAN INFORMATION			MOTOR INFORMATION					ACCESSORIES									
			CFM	SP	RPM	HP	VOLTS	HZ	PH	TYPE										